TEMBOU

Medical Care(Nursing home)

Rehabilitation Hospital

EASY
ONE PERSON OPERATE
CONVENIENCE
LIFESTYLE
PORTABLE
AMAZED
SAFE
EFFICIENCY
JOLLY
COMFORT
BODY & HAIR
DEEP CLEAN

TEMBOU

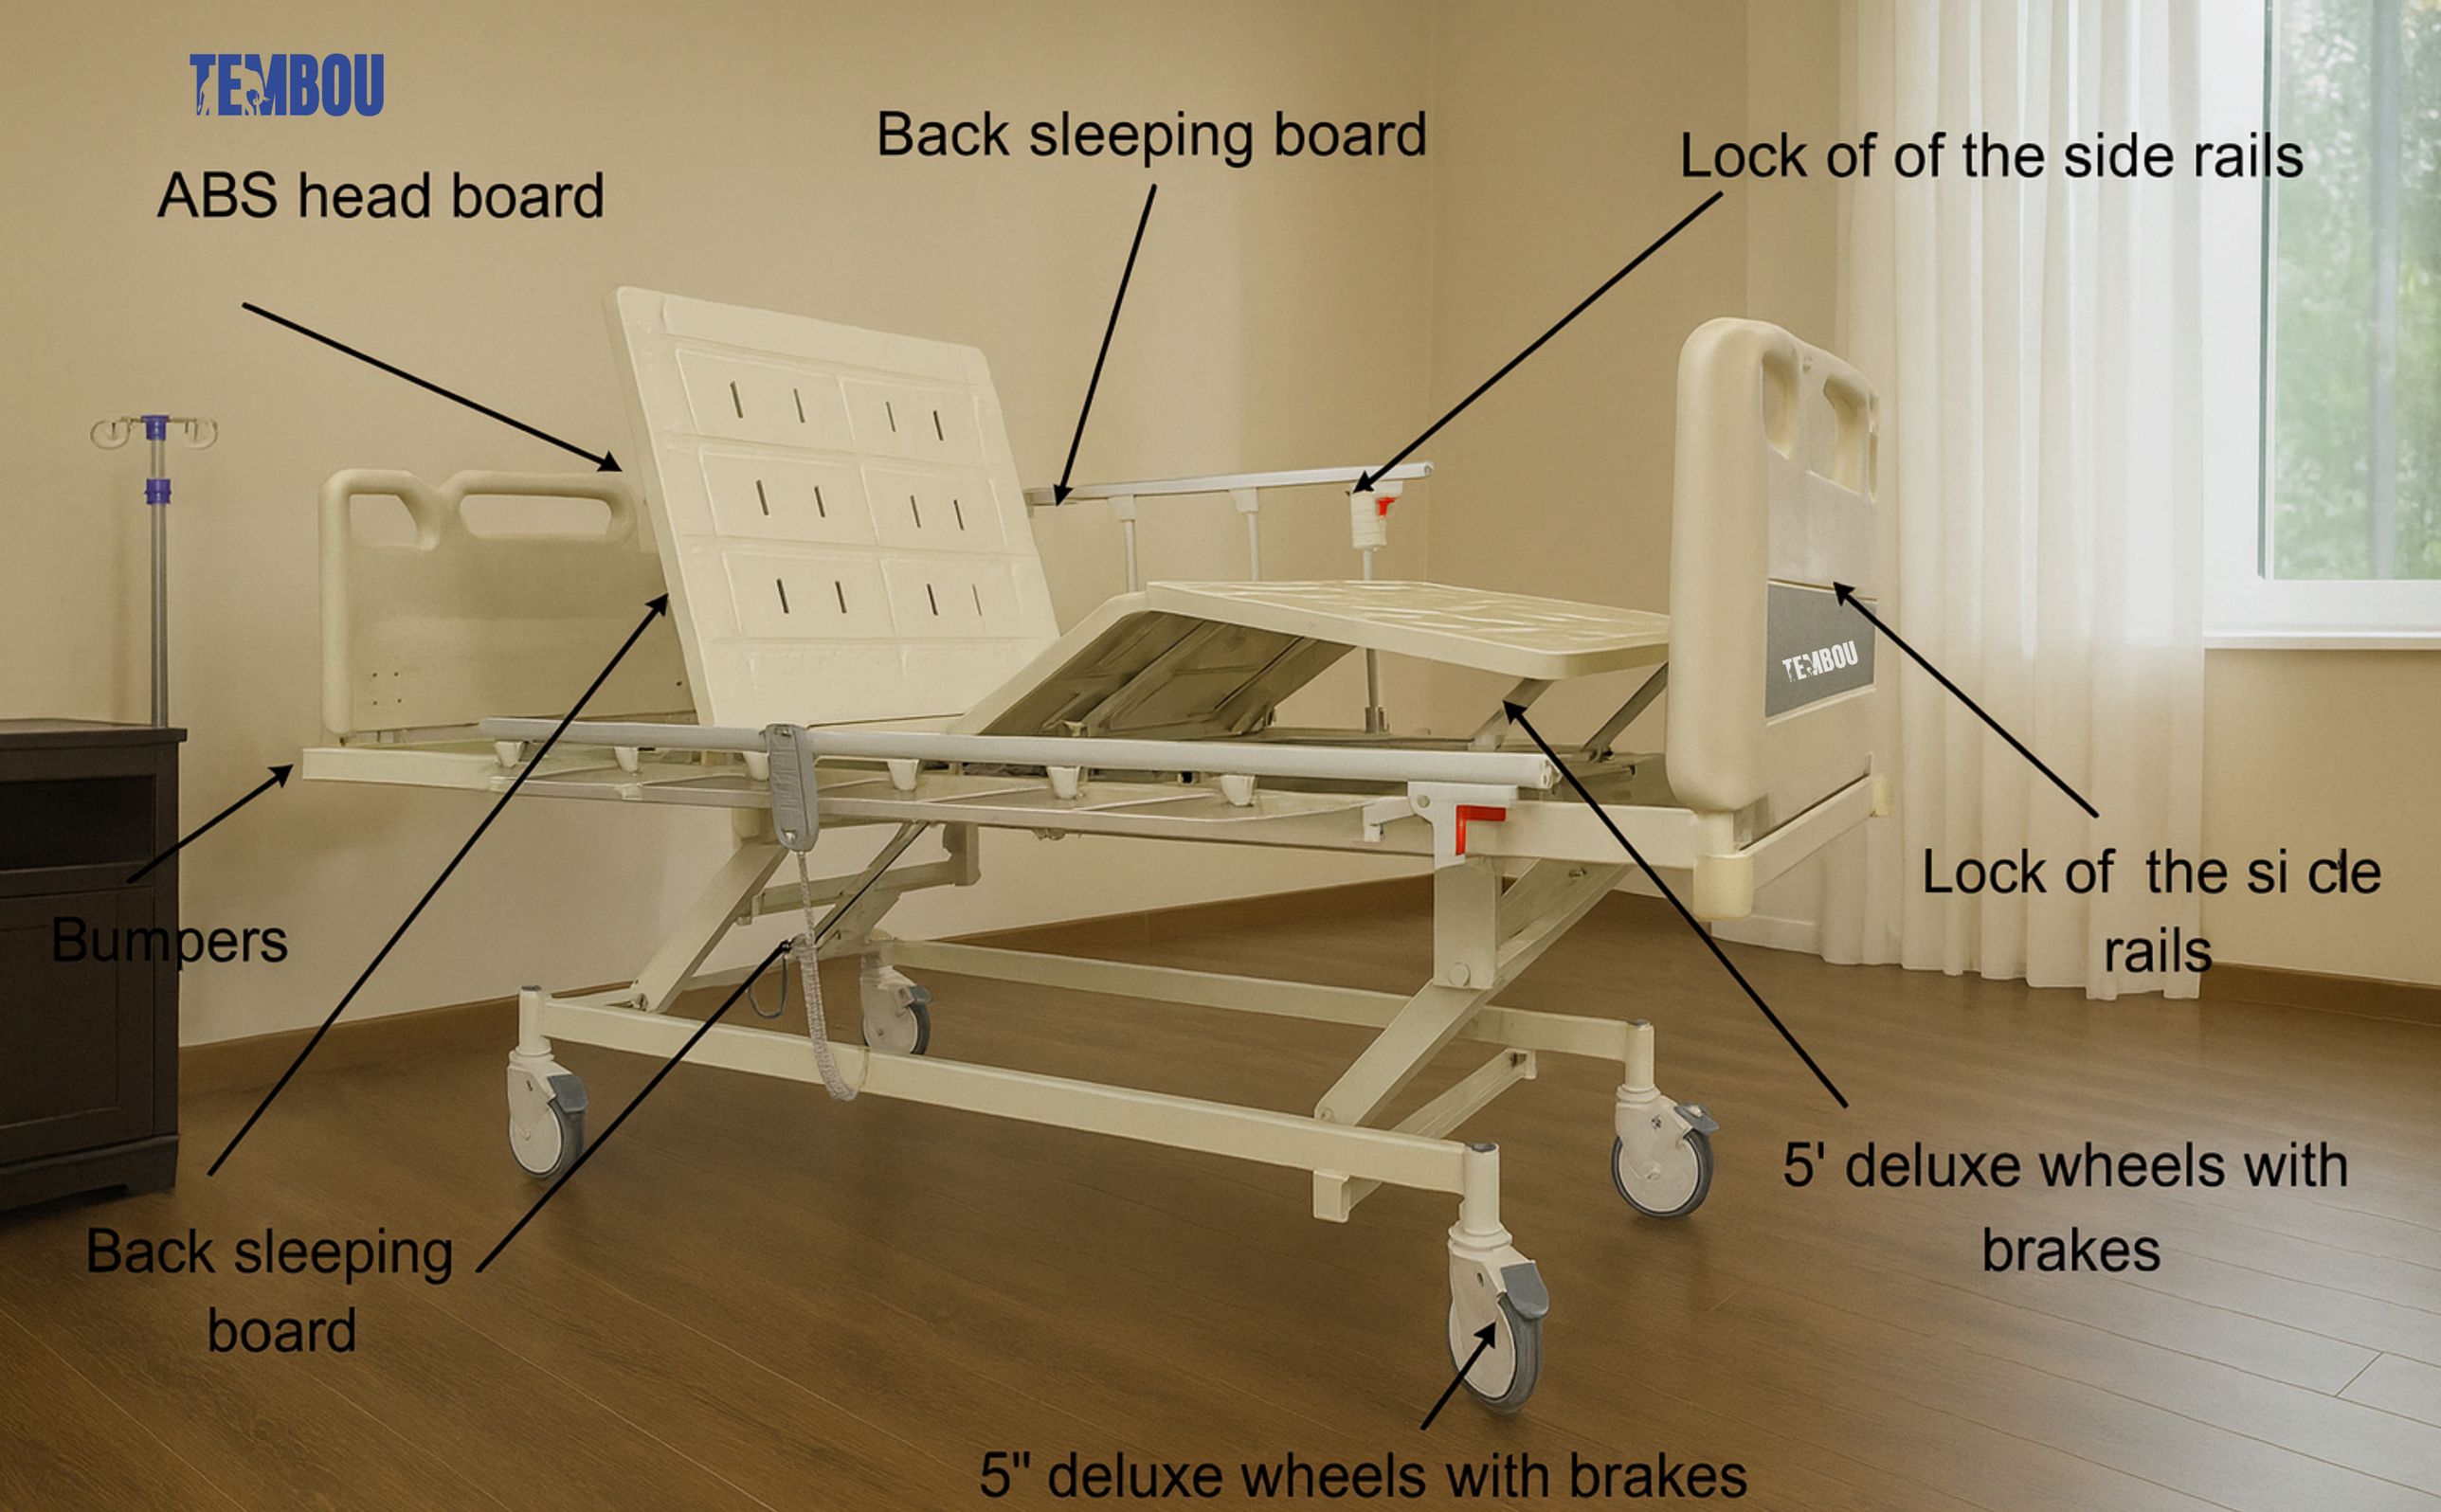
TEMBOU
ABS head board
Back sleeping board
Lock of of the side rails
Bumpers
Back sleeping board
Lock of the si cle rails
5' deluxe wheels with brakes
5" deluxe wheels with brakes

FOUR-FUNCTION ELECTRIC MEDICALBED

Function

- Back section: 0-80°(±5°)
- Knee section: 0-40° (±5°)
- Hi-Low: 255-640MM

Features

- With one pair detachable ABS head and foot boar*
- With one pair aluminumside rail
- With 4pcs Hydrauliceep boards
- With 4pcs 5° Individual lock wheels with dust cover

Size: 2090*1050*255-640mm (L*W-H)

Option: Dining table, mattress; bedside cabinet

Motor hrand: TIMOTION

Backrest

Kheerest

Auto Contour

Low Height

Low Height

High Height

TEMBOU

TEMBOU

HOSPITAL ELECTRIC BED

- 3-Section Foam Mattress
- Split Safety Side Rails
- Electric Adjustment
- Locking Castors

3-Section Foam Mattress

Electric Adjustment

Split Safety Side Rails

TEMBOU

Design for a better life

TF Card

Air Filter ×5

User Manual

Full Face Mask

Air Tubing

T-junction

Power Supply

Carrying Bag

Auto BIPAP VM-7&VM-8

Patient-device synchrony
Real-time displaying



Whisper quiet
light and compact

Intelligent
Breathing Algorithm

Efficient heating
humidifer system

Professional sleep study report

Unique sleep study report of whole week & month.

Easy operation, exquisite interface.

CE 0197 TÜV ISO

Specification

Description	Auto BIPAP VM-7(ST25)	Auto BIPAP VM-8(ST30)
Work Mode	CPAP, Auto,S, T, ST, Auto S	CPAP, Auto,S, T, ST, Auto S, APCV
Sound	≤ 22 dBA @10cmH2O	
Screen	2.8 inch TFT, 320 x 240	
Pressure Range	4-25 cmH2O	4-30 cmH2O
IPAP	4-25 cmH2O	4-30 cmH2O
EPAP	4-20 cmH2O	4-20 cmH2O
Data Storage	> 5 years	
Power	Input: 100–240V~, 50–60Hz, 1.6A Max. Output: 24V ⎓ 2.5A	
Over-Temperature Protection	Stop automatically, alarm with 4 times beeps	
Parameter Lock	Yes	
Screen	Screen off in 15 minutes, press any button to highlight screen	
Backup Rate	5-50min, adjustable	
I/E	10-80%	
Ramp Time	0-60min, adjustable 1min/Step	
Auto ON/OFF	Yes	
Inspirate Triggle	1-5 level	
Expirate Level	1-5 level	
Inspirate Sensitivity	1-5 level	
EPR(Expiratory Pressure Relief)	Yes, 0-3 level	
Auto-Altitude	Yes	
Leak Compensation	Yes	
Awake Detection	Yes	
Breath Event Detection	Yes	
Water Tank Capacity	200mL Max	
Humidifier Level	Integrated Heated, 0-5 level	
Alert	Power off, Air leakage	
Dimensions(cm)	29L x 15W x 10H (machine)	
Carton Dimensions(cm)	34.5L x 20.5W x 25.5H (1pc carton)	
	39.5L x 34W x 25.5H (2pcs carton)	
	59.5L x 34W x 25.5H (3pcs carton)	
Gross Weight	4.5Kg (1pc/carton)	
	8.1Kg (2pcs/carton)	
	11.5Kg (3pcs/carton)	
Warranty	2 years	

TEMBOU

Design for a better life

TF Card | Air Filter ×5 | User Manual | Nasal Mask | Air Tubing | Power Supply | Carrying Bag

Auto CPAP VM-6

Whisper quiet , light and compact

Ultra-quiet design, noise <22 dBA; Small and Light, portable design.

Effective Treatment

AST(Automatic Synchronization Technology) anticipates respiratory waveform and provides corresponding pressure to ensure patient's comfort and mechanical synchrony.

Efficient heating humidifer system

Integrated thermostatic humidifier, Anti-backflow design, avoid dry burning or water overflow.

Professional sleep study report

Unique sleep study report of whole week & month, easy operation, exquisite interface.

CE 0197 TÜV ISO

Specification

Description	Auto CPAP VM-6
Work Mode	CPAP, Auto
Sound	≤ 22 dBA @10cmH_2O
Screen	2.8 inch TFT, 320 x 240
Pressure Range	4-20 cmH_2O, automatic adjustment
Data Storage	> 5 years
Power	Input: 100–240V~, 50–60Hz, 1.6A Max. Output: 24V ⎓ 2.5A
Over-Temperature Protection	Stop automatically, alarm with 4 times beeps
Lock Function	Yes
Screen Off	Screen off in 15 minutes, press any button to highlight screen
Ramp Time	0-60min, adjustable 1min/Step
Auto ON/OFF	Yes
EPR(Expiratory Pressure Relief)	Yes, 0-3 level
Auto-Altitude	Yes
Leak Compensation	Yes
Awake Detection	Yes
Breath Event Detection	Yes
Auto Pressure Titration	Yes
Water Tank Capacity	200mL Max.
Humidifier Level	Integrated Heated, 0-5 level
Alert	Power off, Air leakage
Machine Dimensions(cm)	29L x 15W x 10H (machine)
Carton Dimensions(cm)	34L x 20.5W x 25.5H (1pc carton)
	39.5L x 34W x 25.5H (2pcs carton)
	59.5L x 34W x 25.5H (3pcs carton)
Gross Weight	4.5Kg (1pc/carton)
	8.1Kg (2pcs/carton)
	11.5Kg (3pcs/carton)
Warranty	2 years

TEMBOU

Design for a better life

SD Card | Air Filter ×5 | User Manual | Nasal Mask | Air Tubing | Power Supply | Carrying Bag

Auto CPAP DS-6

Comfort

EPR(Expiratory Pressure Relief,0-3 level)ensure comfort degree Automatic Synchronization Technology ensure the ventilator and patient to achieve perfect synchronization, which make patients nice experience.

Quiet : Noise≤25 dBA

High efficiency brushless DC motor, 10ms of rapid response
Patent for cancel muffling technology.

Easy Operation

Special water tank to make operation very easy and humanized.

Professional doctor software

Intelligent doctor software greatly reduce doctors' workload.

CE 0197 TÜV ISO

Specification

Description	DS-6
Work Mode	CPAP, Auto
Color	Silver
Sound	≤ 25 dBA @10cmH_2O
Screen	2.8 inch TFT, 320 x 240 pixels
Pressure Range	4cmH_2O-20 cmH_2O, automatic adjustment
Data Storage	>5 years
Power Supply	Input: 100-240V~, 50/60Hz, 1.6A Max. Output: 24V⎓ 2.5A
Over-Temperature Protection	Stop automatically, alarm with 4 times beeps
Parameter Lock	Yes
Screen off	Screen off in 15 minutes, press any button to highlight screen
Ramp time	0-60 min, adjustable 1min/Step
Auto ON/OFF	Yes
EPR(Expiratory Pressure Relief)	Yes, 0-3 level
Auto-Altitude	Yes
Leak Compensation	Yes
Awake Detection	Yes
Breath Event Detection	Yes
Auto Pressure Titration	Yes
Water Tank Capacity	220mL Max.
Humidifier Level	Integrated Heated, 0-5 level
Alert	Power off, Mask off
Dimensions(cm)	28L x 14W x 9.5H (machine)
Carton Dimensions(cm)	37.5L x 34W x 15H (1pc/carton)
	39L x 32.5W x 37.5H (2pcs/carton)
	49L x 39W x38H (3pcs/carton)
Weight(with humidifier)	3.8Kg (1pc/carton) 8.8Kg (2pcs/carton) 11.8Kg (3pcs/carton)
Warranty	2 years

TEMBOU

Design for a better life

TF Card

Air Filter ×5

User Manual

Nasal Mask

Heated Air Tubing

Power Supply

Carrying Bag

DF series Auto CPAP

- 22 dBA ultra-low noise
- Sponge-free design for silence box, protect healthy breathing
- Advanced noise-canceling technology, enjoy comfortable sleeping

- User data information showed on screen
- Professional software to generate sleep reports

- Various alarm prompts to protect the treatment effect of patients

- Built-in humidifier and optional heated air tubing
- Stable temperature and humidity control

- Optional GPRS/WIFI module for data transmission realize remote management

- Optional bluetooth oximeter
- Show SpO2 value on screen

Specification

Product model	DF-20A-HM	DF-25S-HM
Work mode	CPAP，AUTO	CPAP，AUTO，Auto S
Pressure Range	4-20 cmH2O, automatic adjustment	4-25 cmH2O, automatic adjustment
Expiratory pressure	／	4cmH2O~25cmH2O
Inspiratory pressure	／	4cmH2O~25cmH2O
Tubing heating function	Yes	
Mobile network	Optional	
Data cloud platform	Optional	
Pressure rise/fall time	／	100ms-900ms
I/E sensitivity	／	5 levels
Pressure difference	／	2cmH2O~10cmH2O
Ramp time	0-60min	
Noise	≤ 22dBA @10cmH2O	
Data storage	TF card, >5 years	
Screen (inch)	3.5inch color display	
Humidity level	Heating and humidification, level 1-5 adjustable	
Heating tubing temperature	10°C-30°C adjustable, step size 1°C	
Preheat	ON/OFF	
Flight mode	ON/OFF	
Bluetooth oximeter	Optional	
Alarm	Mask off, suffocation, pressure abnormality, tubing abnormality	
Power	Input: 100-240V~, 50/60Hz, 1.5A Max. Output: 24V ⎓ 3A	
Dimensions(cm)	26.68Lx17.25Wx11.85H(machine)	
Carton dimensions(cm)	41L x 29W x 17.5H (1pc/carton)	
	41L x 32.5W x 30H (2pcs/carton)	
	48L x 41W x 30H (3pcs/carton)	
Weight(with humidifier)	4.07Kg (1pc/carton)	
	7.74Kg (2pcs/carton)	
	11.57Kg (3pcs/carton)	

TEMBOU

Design for a better life

SD Card | Air filter ×5 | User Manual | Full Face Mask | Air Tubing | T-Junction | Power Supply | Carrying Bag

BIPAP DS-7 & DS-8

CE 0197 TÜV ISO

Effective Treatment

AST(Automatic Synchronization Technology) anticipates respiratory waveform and provides corresponding EPAP and IPAP to ensure patient's comfort and mechanical synchrony.

Data Management

SD card (available per customers' request).

Two cups water per night, anti counter-current, Anti-dry safety protection technology

Up and Down key makes operation very easy and durable

Real-time display treatment data

Specification

Description	BiPAP DS-7(ST25)	BiPAP DS-8(ST30)
Work Mode	CPAP, Auto, S, T, ST	CPAP, Auto, S, T, ST, APCV
Color	Grey	
Sound	≤ 25 dBA @10cmH_2O	
Screen	2.8 inch TFT, 320 x 240 pixels	
Pressure Range	4-25cmH_2O	4-30cmH_2O
IPAP	4-25cmH_2O	4-30cmH_2O
EPAP	4-20cmH_2O	4-20cmH_2O
Data Storage	›5 years	
Power	Input: 100-240V~, 50/60Hz, 1.6A Max. Output: 24V ⎓ 2.5A	
Over-Temperature Protection	Stop automatically, alarm with 4 times beeps	
Parameter Lock	Yes	
Screen off	Screen of in 15 minutes, press any button to highlight screen	
Backup Rate	4bpm-50bpm, step size 1bpm, tolerance ±1bpm	
I/E	10-80%	
Ramp time	0-60min, adjustable 1min/Step	
Auto ON/OFF	Yes	
Inspirate Triggle	1-5 level	
Expiratory Level	1-5 level	
Inspirate Sensitivity	1-5 level	
EPR(Expiratory Pressure Relief)	Yes, 0-3 level	
Auto-Altitude	Yes	
Leak Compensation	Yes	
Awake Detection	Yes	
Breath Event Detection	Yes	
Water Tank Capacity	220mL Max.	
Humidifier Level	Integrated Heated, 0-5 level	
Alert	Power off, Mask off	
Dimensions(cm)	28L x 14W x 9.5H (machine)	
Carton Dimensions(cm)	37.5L x 34W x 15H (1pc/carton)	
	39L x 32.5W x 37.5H (2pcs/carton)	
	49L x 39W x 38H (3pcs/carton)	
Weight(with humidifier)	3.8Kg (1pc/carton) 8.8Kg (2pcs/carton) 11.8Kg (3pcs/carton)	

TEMBOU

Design for a better life

TF Card

Air Filter ×5

User Manual

Full Face Mask

Heated Air Tubing

T-junction

Power Supply

Carrying Bag

DF series BIPAP

- 22 dBA ultra-low noise
- Sponge-free design for silence box, protect healthy breathing
- Advanced noise-canceling technology, enjoy comfortable sleeping

- User data information showed on screen
- Professional software to generate sleep reports

- Various alarm prompts to protect the treatment effect of patients



- Built-in humidifier and optional heated air tubing
- Stable temperature and humidity control

- Optional GPRS/WIFI module for data transmission realize remote management

- Optional bluetooth oximeter
- Show SpO2 value on screen

Specification

Product model	DF-25W-HM	DF-30V-HM
Work mode	CPAP, AUTO, Auto S, S, T, ST	CPAP, AUTO, Auto S, S, T, ST, APCV
Expiratory pressure	4cmH_2O~25cmH_2O	4cmH_2O~25cmH_2O
Inspiratory pressure	4cmH_2O~25cmH_2O	4cmH_2O~30cmH_2O
Tubing heating function	Yes	
Mobile network	Optional	
Data cloud platform	Optional	
Pressure rise/fall time	100ms-900ms	
Pressure difference	2cmH_20~10cmH_20	
I/E ratio	10%-90%	
I/E sensitivity	5 levels	
Backup rate	5bpm-60bpm, step size 1bpm, tolerance ±1bpm	
Target tidal volume	200mL-1200mL, step size 10mL	
Ramp time	0-60min	
Noise	≤ 22 dBA @10cmH_2O	
Data storage	TF card, >5 years	
Screen (inch)	3.5inch color display	
Heating tubing temperature	10°C-30°C adjustable, step size 1°C	
Humidity level	Heating and humidification, level 1-5 adjustable	
Preheat	ON/OFF	
Flight mode	ON/OFF	
Alarm	Mask off, suffocation, pressure abnormality, tubing abnormality	
Bluetooth oximeter	Optional	
Power	Input: 100-240V~, 50/60Hz, 1.5A Max. Output: 24V ⎓ 3A	
Dimensions(cm)	26.68Lx17.25Wx11.85H(machine)	
Carton dimensions(cm)	41L x 29W x 17.5H (1pc/carton)	
	41L x 32.5W x 30H (2pcs/carton)	
	48L x 41W x 30H (3pcs/carton)	
Weight(with humidifier)	4.07Kg (1pc/carton)	
	7.74Kg (2pcs/carton)	
	11.57Kg (3pcs/carton)	